


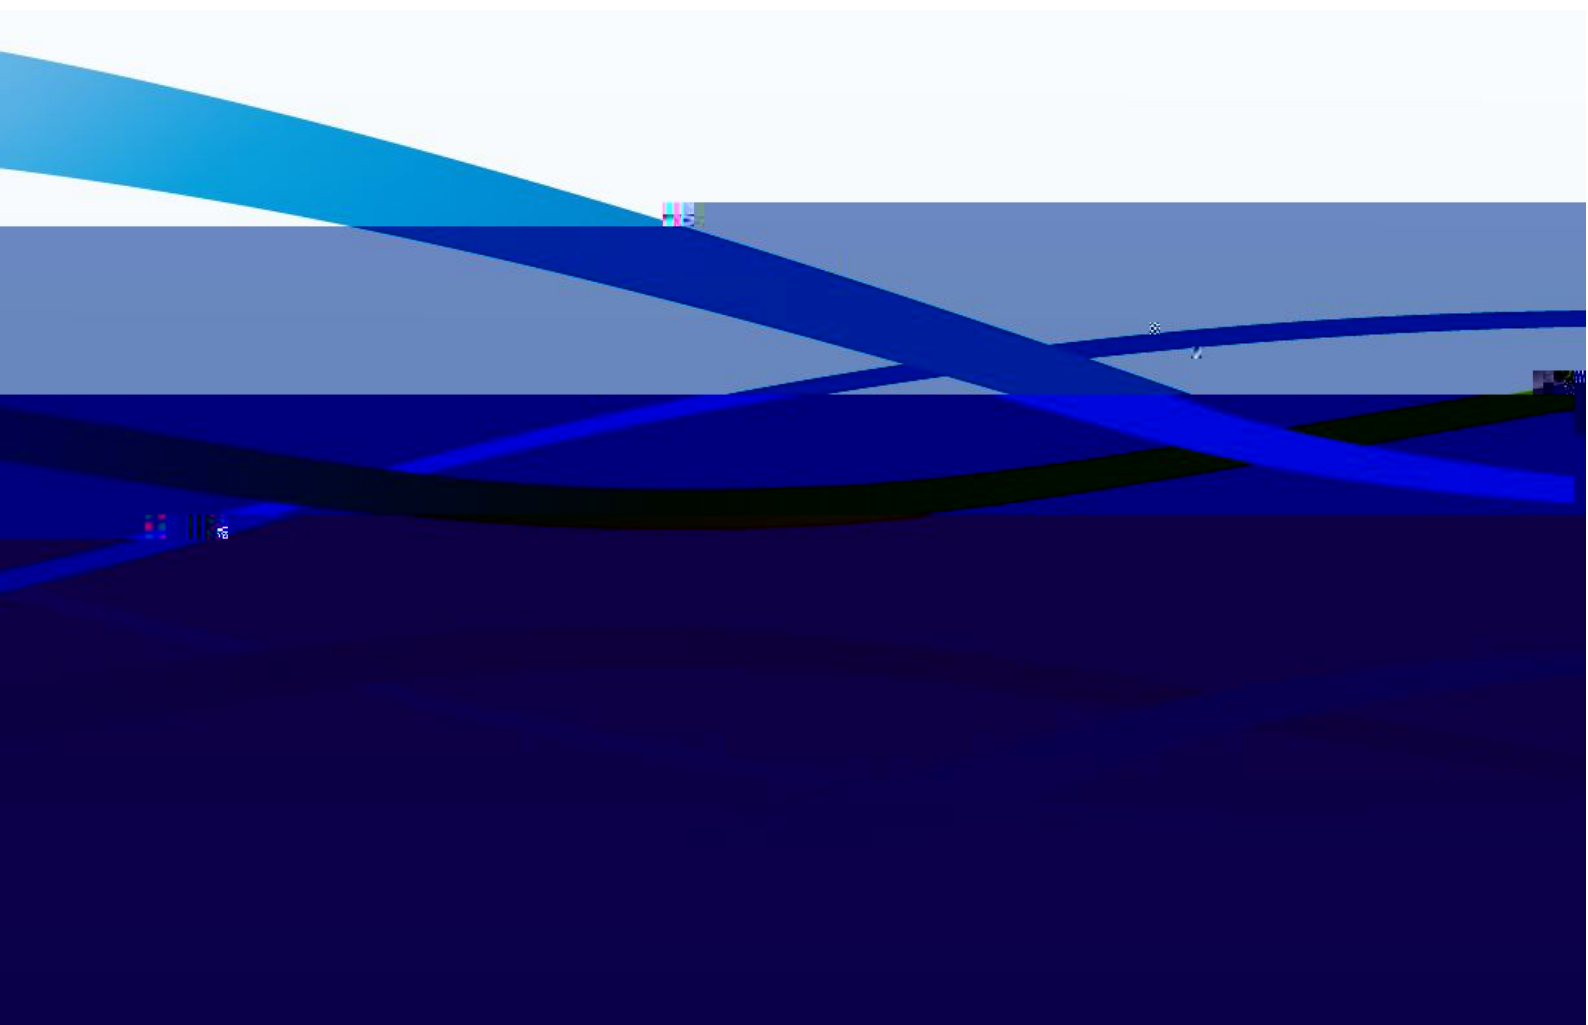

.....	1
4	1
4	2
4	4
4 4	6

4

10kV

10kV

4

4

4

10kV

Ш

4

4

RS232

RS485

Ш

GB/T 17215.322-2008

0.5S

GB/T 17215.323-2008

2

DL/T634.5101-2002

A-1

FTU	FTU
DTU	DTU

4
2.1

FTU
Ш

2.2

3 § 100VШ

2.2

1A 4 5AШ

2.3

1.2 Ш

2.4

50HzШ

2.5

0.5S

2 Ш

2.6

B-1,B-2Ш

1 B-1 FTU

V

A



DC24V

,DTU

DC48V

2.7.1

/ 山
 4 LED 山
 山
 80ms ¥ 16ms 山
 100k á 山

2.7.2 RS232/RS485

RS232/RS485 山
 RS232/RS485 1200bps 4 2400bps 4 4800bps 4
 9600bps 19200bps 9600bps 山

2.7.3

- 1) FTU
 - 24V
 - DC24V 山
 - DC18V~DC36V , 5% 山
 - 山
 - FTU 2W 山
- 2) DTU
 - DC48V 山
 - DC18V~DC72V 5% 山
 - 山
 - DTU 3W 山

4

3.1

4

4

Ш

4

4

4

4

4

Ш

Ш

3.2

0.01Ш

50

0 4



3 山
3.6

96 山

62 山

7 山

山 24 山

24

山

DL/T 634.5101 | 2002 o 山

4 4

FTU





§

§

4


4

Ш

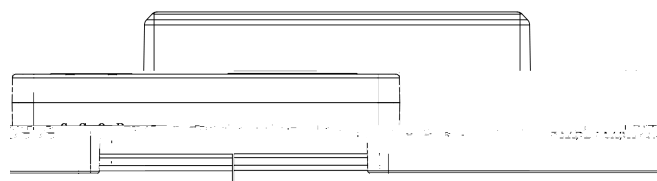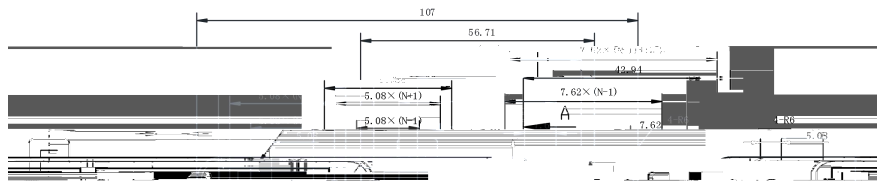




单位: mm

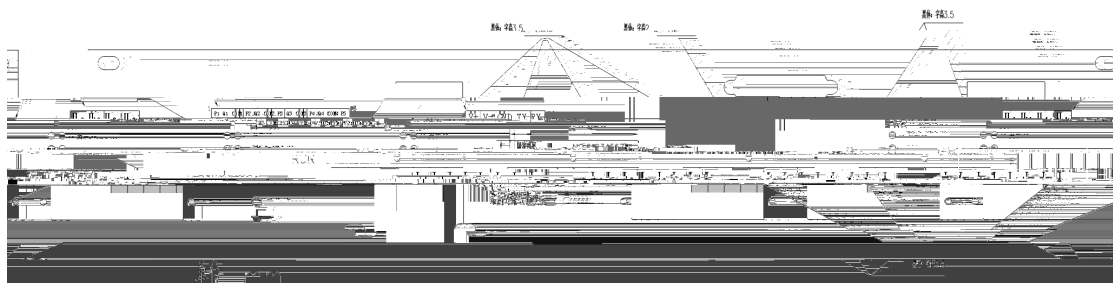

	4	46	48	2	4	DC24V 4RS232/RS485
DB25						4 46 48
	4			4		
W						
	JP12			5.08		4
	5.08			5		DB25
	D-1W					
D-1				DTU		

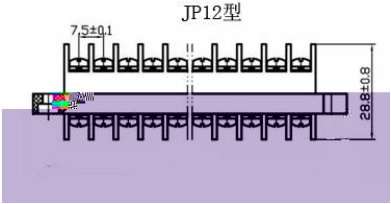1~ 2					
1	Ia1	1A	RVVP2.5m m		
2	Ib1	1B	RVVP2.5m m		
3	Ic1	1C	RVVP2.5m m		
4	In1	1	RVVP2.5m m		

5	Ia2	2A	RVVP2.5m m
6	Ib		

24	COM8	8	RVVP0.2m m		
25	S		RVVP0.2m m		